

# Specification

Drawing No.	TKY1T-H2-25064-00[44]
Issued Date.	February 21, 2025

Note: This is tentative specification only, actual parameters are subject to change when final IC samples are acquired and assessed, and accordingly to part number as well. In addition, various dimensions are provisional dimensions.

Product Name	Crystal Oscillator
Product Model	_____
Frequency	156.250MHz
Customer Part Number	_____
Customer Specification Number	_____
KYOCERA Part Number	KC2520F156.250P26K00
Remarks	RoHS Compliant / MSL 1

## Customer Acceptance

Accept Signature	Accept Date	_____
	Department	_____
	Person in charge	_____

## Seller

KYOCERA Corporation  
Corporate Electronic Components Group  
Electronic Components Sales Division  
6 Takeda Tobadono-cho, Fushimi-ku, Kyoto  
612-8501 Japan  
TEL. No. 075-604-3500  
FAX. No. 075-604-3501

KYOCERA Corporation  
Corporate Electronic Components Group  
Electronic Devices Division  
Yamagata higashine Plant  
5850, Higashine-koh, Higashine-shi, Yamagata  
999-3701 Japan  
TEL. No. 0237-43-5611  
FAX. No. 0237-43-5615

Design Department	Quality Assurance	Approved by	Examined by	Written by
Application Engineering Section3 Electronic Devices Division	A.Ito 	R.Satake 	Y.Kato 	T.Sakuma 

## Revision History

Rev.No.	Description of revise	Date	Approved by	Examined by	Written by
00	First Edition	Feb. 21, 25	R.Satake	Y.Kato	T.Sakuma

## 1. Scope

This specification shall be defined of the Clock Oscillator for the integrated circuits (ICs).

## 2. Customer Part Number

### 3. KYOCERA Part Number

**KC2520F156.250P26K00**

## 4. Electrical Characteristics

### 4-1. Absolute Maximum Rating

Item	Symbol	Rated Value	Units
Power Supply Voltage	V <sub>CC</sub>	-0.3 to +4.0	V
Input Voltage	V <sub>IN</sub>	-0.3 to V <sub>CC</sub> +0.3	V
Storage Temperature	T <sub>STG</sub>	-55 to +125	°C

Note:

If the part is used beyond absolute maximum ratings, it may cause internal destruction. The part should be used under the recommended operating conditions the reliability of this part may be damaged if those conditions are exceeded.

### 4-2. Recommended Operating Conditions

Item	Symbol	Min	Typ	Max	Units	Remarks
Power Supply Voltage	V <sub>CC</sub>	2.375	2.5	2.625	V	
Input Voltage	V <sub>IN</sub>	0	---	V <sub>CC</sub>	V	
Operating Temperature	T <sub>OPR</sub>	-40	+25	+105	°C	

### 4-3. Electrical Characteristics

Item	Symbol	Min	Typ	Max	Units	Remarks
Output Frequency	f <sub>0</sub>	---	156.25	---	MHz	
Frequency Tolerance	f <sub>_tol</sub>	-50	---	+50	ppm	Include initial tolerance, operating temperature range, rated power supply voltage change, load change, aging 1year @25degC
Current Consumption	I <sub>CC</sub>	---	---	65	mA	
Standby Current	I <sub>ST</sub>	---	---	30	μA	
Symmetry (Duty Ratio)	SYM	45	50	55	%	50ohm, @ 50% output swing
Rise Time (20% to 80% Output Swing)	T <sub>R</sub>	---	---	0.4	ns	
Fall Time (80% to 20% Output Swing)	T <sub>f</sub>	---	---	0.4	ns	50ohm
Output voltage -"L"	V <sub>OL</sub>	V <sub>CC</sub> -1.810	V <sub>CC</sub> -1.700	V <sub>CC</sub> -1.620	V	
Output voltage -"H"	V <sub>OH</sub>	V <sub>CC</sub> -1.085	V <sub>CC</sub> -0.950	V <sub>CC</sub> -0.860	V	
Output Load	---		50		Ohm	LV-PECL Output
Input Voltage -"L"	V <sub>IL</sub>	---	---	30% V <sub>CC</sub>		
Input Voltage -"H"	V <sub>IH</sub>	70% V <sub>CC</sub>	---	---		
Output Disable Time	t <sub>dis</sub>	---	---	200	ns	
Output Enable Time	t <sub>ena</sub>	---	---	10	ms	
Start up time	t <sub>sta</sub>	---	---	10	ms	@Minimum operating voltage to be 0sec
Deterministic Jitter*	DJ	---	---	2	ps	DJ pk-pk
1sigma Jitter*	J <sub>Sigma</sub>	---	---	4	ps	
Peak to Peak Jitter*	J <sub>PK-PK</sub>	---	---	30	ps	
Phase Jitter**	---	---	---	0.1	ps	

Note: All electrical characteristics have defined on the maximum loaded and recommended operating conditions.

\* Based on Time Interval Analyzer "Wavecrest SIA-3000".

\*\*Measurement Condition BW: 12kHz to 20MHz @+3.3V, 25degC

**Table 1**

### 4-4. Measurement Condition

The reference temperature shall be +25±2°C. The measurement shall be performed at the temperature range of +5 °C to +35 °C unless otherwise the result is doubtful.

### 4-5. Measurement Circuit

The electrical characteristics shall be measured by test circuit "Fig. 1". Also jitter shall be measured by test circuit "Fig. 3".

## 4-6. Clock Timing Chart

The clock timing chart is "Fig. 2".


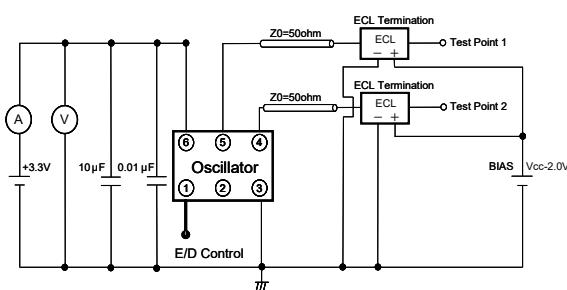


Fig.1 Test Circuit

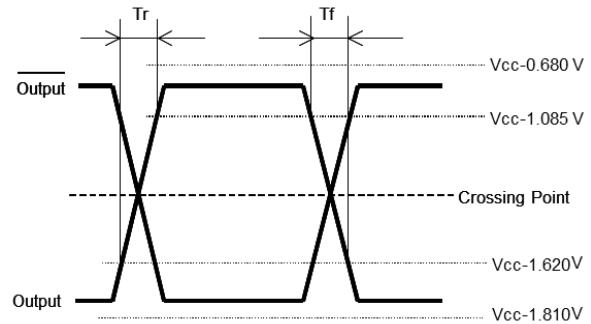

The Tr/Tf defined between 20% and 80% Output Swing.

Fig.2 Clock Timing Chart



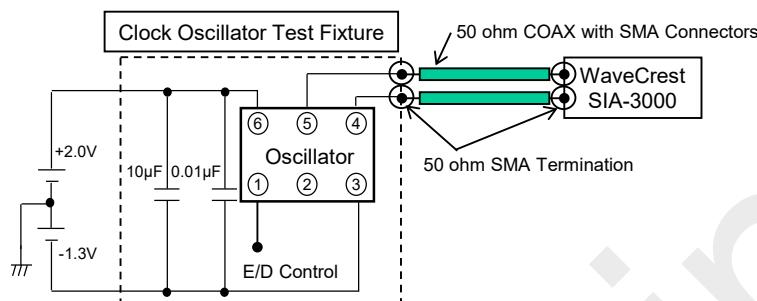


Fig.3 Jitter Test Circuit

## 5. Dimensions and Marking

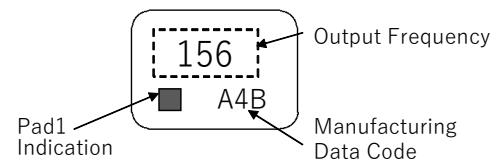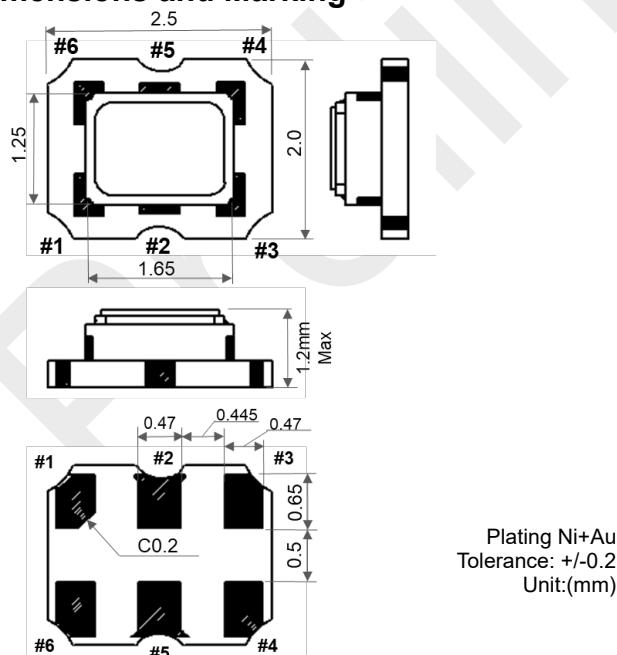

## Output Frequency

The output frequency is seven-digit including a decimal point. The frequency greater than the number of digits have rounded off. (E.g. 133.3333MHz → "133.333")

## Model

See Table 2

## Manufacturing Date Code

Year	Code	Year	Code	Month	Code	Day	Code	Day	Code	Day	Code
2020	W	2031	L	1	1	1	11	B	21	M	
2021	A	2032	M	2	2	2	12	C	22	N	
2022	B	2033	N	3	3	3	13	D	23	P	
2023	C	2034	P	4	4	4	14	E	24	Q	
2024	D	2035	Q	5	5	5	15	F	25	R	
2025	E	2036	R	6	6	6	16	G	26	S	
2026	F	2037	S	7	7	7	17	H	27	T	
2027	G	2038	T	8	8	8	18	J	28	V	
2028	H	2039	V	9	9	9	19	K	29	W	
2029	J	2040	W	10	A	10	20	L	30	X	
2030	K	2041	A	11	B						
				12	C						

It repeats from A in 2041 and afterwards.

e.g. : "C46" means "Apr-16-2023"

Pad arrangement	
1	Stand-by Function
2	NC
3	Case GND
4	Output
5	Complementary Output
6	V <sub>cc</sub>

Stand-by Function	
Pad1	Pad4/Pad5
OPEN	Active
"H" Level	Active
"L" Level	No-Oscillation

Stability		Model Code
Code	(ppm)	KC2520F156.250P26K00
6	±50	156

Table 2

## 6. Parts Numbering Guide

**KC2520F 156.250 P 2 6 K 00**

A      B      C      D      E      F      G

- A. Series (6pad SMD Crystal Oscillator)
- B. Output Frequency  
156.25 MHz
- C. Output  
P: LV-PECL
- D. Supply Voltage  
2: 2.5V
- E. Frequency Tolerance\*  
4-3. Electrical Characteristics reference
- F. Symmetry (Duty Ratio) and Stand-by Function  
K: Symmetry: 45% to 55% with Stand-by Function
- G. Suffix for Individual Requirements  
(STD Specification is "00")

Packing (Tape & Reel 2,000pcs/Reel)  
\*Over All Conditions:  
Include initial tolerance, operating temperature range, rated power supply voltage change, load change, aging (1year @+25°C),


## 7. Environmental Characteristics

Items	Conditions	Criteria of Acceptance
7-1. Solderability	Soaking: +245±5°C, 5.0±0.5sec	Dipped potion: Minimum 95% coverage
7-2. Soldering Heat Resistance	Reflow soldering: Peak +260°C max, 10sec, Twice max	Without looseness or crack etc.
7-3. Temperature Cycle	10 cycles: -55°C to +125°C (30minuts each/ cycle)	
7-4. Mechanical Shock (Pulse)	5 times 14,750m/sec <sup>2</sup> (1,500G), Duration of pulse 0.5msec (MIL-STD-883D-2002.3 Condition B)	
7-5. Vibration	4 times each axis X, Y, Z: 20 to 2,000Hz and 2,000Hz to 20Hz/cycle Peak acceleration 196m/sec <sup>2</sup> (20G) (MIL-STD-883D-2007.2 Condition A)	Clause 7-10 shall be satisfied.
7-6. High Temperature	1000 hours: Temperature: +85+5/-3°C	
7-7. Low Temperature	1000 hours: Temperature: -40+5/-3°C	
7-8. Humidity Cycle	10 cycles: Based on 1004 specifications (MIL-STD-883D-1004.7)	Clause 7-1 shall be satisfied.
7-9. Hermeticity 1 (Gross leak)	Soaking: +125°C, 5minutes	No bubbles appeared
7-10. Hermeticity 2 (Fine leak)	Measured by Helium Detector Equipment (MIL-STD-883D-1014.10 Condition A1)	5x10 <sup>-9</sup> Pa m <sup>3</sup> /sec max

After each testing, the parts shall be subjected to standard atmospheric conditions more than 2 hours. After that, the electrical characteristics shall be measured. The result of the test shall be satisfied **Table 1**.

**Table 3**


## 8. Recommended Land pattern and Soldering Guide

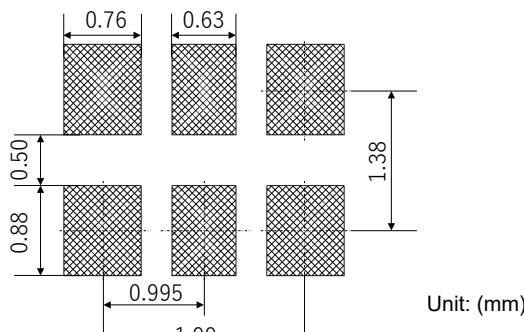

Note:

Since the part doesn't have Bypass Capacitor between  $V_{cc}$  and GND, Please mount high frequency type capacitor 0.01 $\mu$ F and 10 $\mu$ F to the nearest position of oscillator.


Fig.4 Land pattern

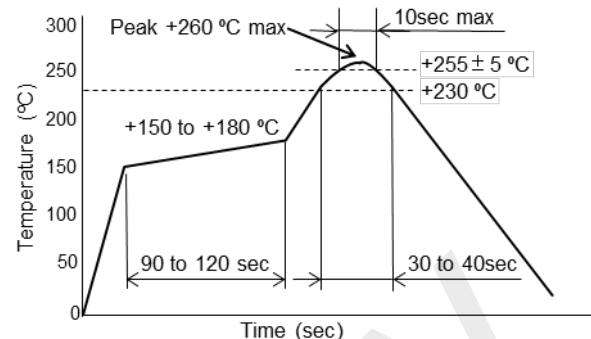

- Available Reflow times: Maximum twice

Fig.5 Reflow profile (Lead Free Available)


## 9. Taping Specifications

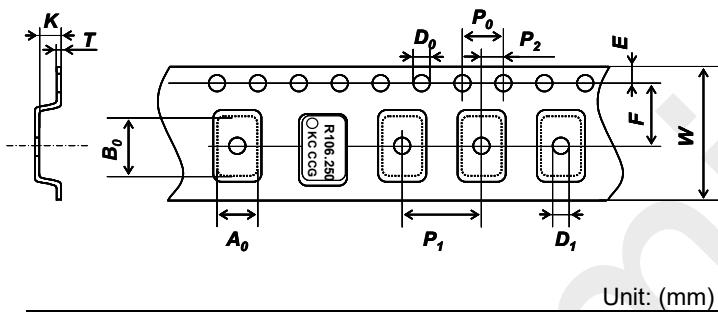

Unit: (mm)

Symbol	$A_0$	$B_0$	$W$	$F$	$E$
Dimensions	$2.2 \pm 0.1$	$2.7 \pm 0.1$	$8.0 \pm 0.2$	$3.5 \pm 0.05$	$1.75 \pm 0.1$
Symbol	$P_1$	$P_2$	$P_0$	$D_0$	$T$
Dimensions	$4.0 \pm 0.1$	$2.0 \pm 0.05$	$4.0 \pm 0.1$	$1.5 \pm 0.1/-0$	$0.2 \pm 0.05$
Symbol	$K$	$D_1$			
Dimensions	T.B.D.	$1.1 \pm 0.1$			

Fig.6 Emboss Carrier Tape

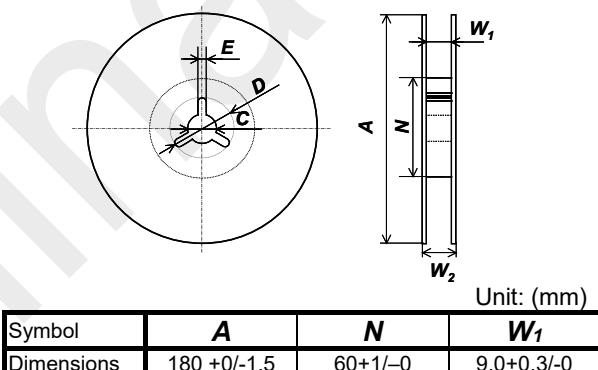

Unit: (mm)

Symbol	$A$	$N$	$W_1$
Dimensions	$180 \pm 0/-1.5$	$60 \pm 1/-0$	$9.0 \pm 0.3/-0$
Symbol	$W_2$	$C$	$D$
Dimensions	$11.4 \pm 1.0$	$13.0 \pm 0.2$	$21.0 \pm 0.8$
Symbol	$E$		
Dimensions	$2.0 \pm 0.5$		


Fig.7 Reel

### 9-1. Taping Quantities

- The taping of per reel shall be packed 2,000 pcs.
- The parts shall be contained continuously in the pocket.

### 9-2. Leader and Blank Pockets

- The package shall be consisted of leader, blank pockets and loaded pocket as follows "Fig. 8".
- The power of peeling strength between top tape and carrier tape shall be 0.1N(10gf) to 1.0N(100gf) as follows "Fig. 9".

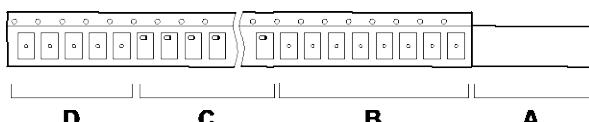

- A) Leader
- B) Blank Pocket (40mm to 320mm)  
 $A+B$ : 400mm to 560mm
- C) Load Pocket
- D) Blank Pocket (160mm minimum)

Fig.8 Packing Method

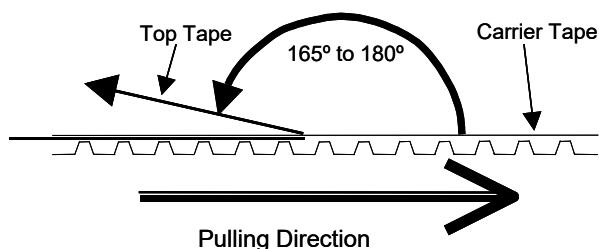


Fig.9 Peeling Strength

### 9-3. Reel Label

The reel label shall be consisted as below. (Based on EIAJ C-3 format)

A) Customer Part Number	D) Shipping Date
B) Lot No.	E) Vender Name
C) Quantities	

### 9-4. Exterior Package Label

The oscillator shall be packed properly to avoid defect in transportation. The exterior package label shall be consisted as below.

A) Name of Customer	E) Quantities
B) P/O No.	F) Shipping Date
C) Customer Part Number	G) Vender Name
D) Lot No.	

## 10. The agreement of this specifications

In case there is any obscure point or doubt concerning the contents of the specification, it shall be settled through consultation of both parties.

## 11. Remarks on Usages

### A) Storage Conditions

The parts shall be stored in temperature range of -5 to +40°C, humidity 40 to 60% RH, and avoid direct sunlight. Then the parts shall be used within 6 months.

### B) Handling Conditions

Although the part has protection circuit against static electricity, when excess static electricity is applied, the inside IC may get damaged.

Before mounting on the PCB, please make sure the direction of the part is correct. Otherwise the part of temperature will increase. And also the part will have some damages.

Please do not use the parts under the unfavorable condition such as beyond specified range in this specification.

Please do not use the parts under the condition, in the water or in the salt water also environment of dew or harmful gas.

Please make sure the condition of pick and place following pick up nozzle guideline.

Picking Method: Case of Head Unit 1.6 x 1.2mm (Inside Diameter)

The proper condition of pick and place will be different each equipment. Therefore, please check before testing.

This product can be used for general electronic equipment (information equipment, communication equipment, audiovisual equipment, measuring equipment, home appliances, etc.) Intended to be used. Equipment and systems (traffic equipment, safety equipment, aviation / space control, nuclear power control, life support equipment) that require special quality and reliability and whose failure or malfunction may endanger human life or harm the human body. (Including medical devices, etc.), basic driving functions (running, turning, stopping) and collision safety in traffic equipment, applications related directly or indirectly to collision safety, and applications that are expected to have a significant impact on property, etc. It is not intended to be used. In the unlikely event that this product is used for any of these purposes, we will not be liable for any damages resulting from such use.

### C) Rework Condition

Please do not pick up Head Unit. We can't guaranty electrical performance and reliability.

### D) Soldering Conditions

This product can respond to the general Pb-free reflow profile. The wave soldering cannot be supported.

**E) Soldering in Mounting**

In case of Solder paste and conductive glue contact product lid or product side face exception for product terminal it's possible to influence product characteristics.  
Please be careful above contents.

**F) Washing Conditions**

Ultra sonic cleaning is available. However there is a possibility that Crystal in the part may cause damaged under certain condition. Therefore please test before using.  
After washing, please dry the parts completely. Otherwise water drops between the parts and PCB may cause migration.

In case of using this part without above precaution, Kyocera is unable to guarantee the specific characteristics.

**12. Quality guarantee**

In case when Kyocera Corporation rooted failure occurred within 1year after its delivery, substitute product will be arranged based on discussion. Quality guarantee of product after 1year of its delivery is waivered.

**13. Others**

In case of any questions or opinions regarding the Specification, please have it in written manner within 45 days after issued date.  
If you do not contact us within the deadline, we will assume that the items listed are approved.